

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: BARSS, ALBALOY PLATED
- 4 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 5 FASTENING NUT: BRASS, NICKEL PLATED
- 6 INSULATOR: PEI
- 7 GASKET: SILICONE RUBBER


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHZ
- 3 VSWR: 1.25 MAX.

ENVIRONMENTAL DATA:



- 1 TEMPERATURE RANGE: -40°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/30/15	J. QU

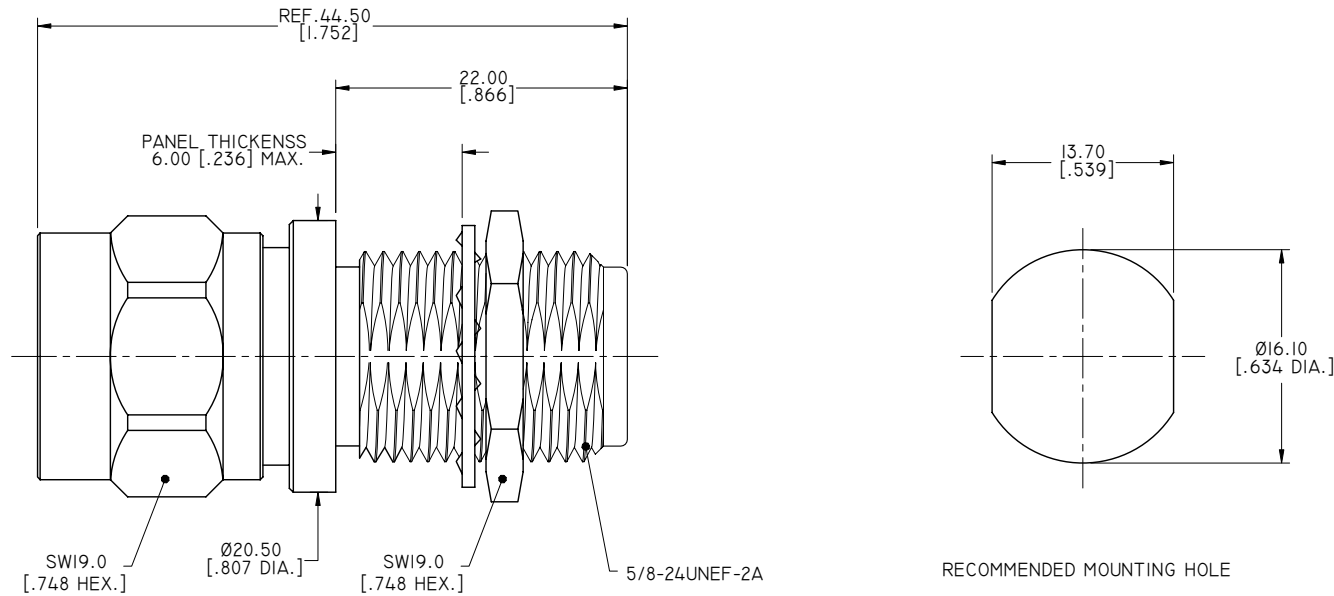

NOTES

- I. FASTENING NUT AND LOCK WASHER SEPARATE PACKED

DRAWN X. B. YANG	DATE 10/30/15	 <p>ANOISON ...we create connection for technologies</p>
CHECKED L. YANG	DATE 10/30/15	
APPROVED J. QU	DATE 10/30/15	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD</small>
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		TITLE ADAPTER, N MALE TO N FEMALE BULKHEAD
VIEW 		PART NO. ANO 511-512-1329
SIZE A3	SCALE 2.5:1	SHEET 1/1
		REV. A

4

3

2

1