MATERIAL & FINISH:

1. BODY: BRASS, NICKEL PLATED
2. CENTER CONTACT: BRASS, GOLD PLATED
3. INSULATOR: PTFE
4. COUPLING NUT: BRASS, NICKEL PLATED
5. CRIMP FERRULE: COPPER, NICKEL PLATED
6. GASKTE: MVQ(SILICONE RUBBER)

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~6 GHz
3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -65℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/11/25	J. Q

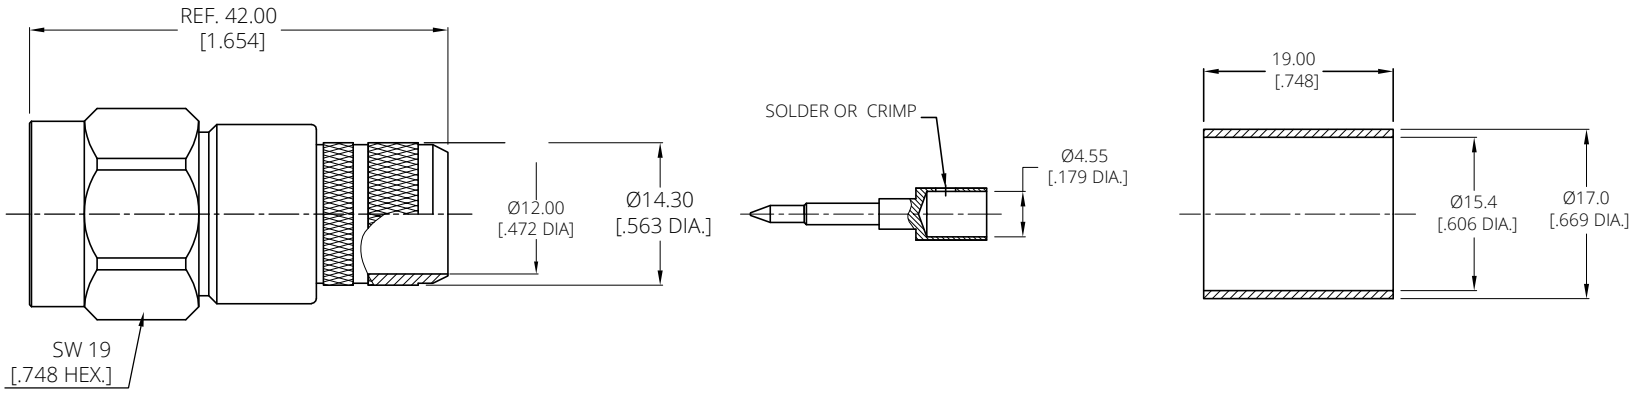

HEX.CRIMP TOOL



HEX. 4.8 [.189]
WIDTH: 4.0 [.157]

HEX.CRIMP TOOL



HEX. 15.50 [.610]
WIDTH: 13.40 [.528]

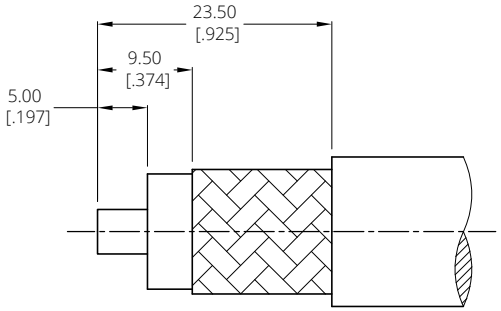

CABLE STRIPPING DIMENSIONS

DRAWN	W. Y	DATE	02/11/25
CHECKED	X. Y	DATE	02/11/25
APPROVED	J. Q	DATE	02/11/25

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD

ANOISON

TITLE

N STRAIGHT MALE CRIMP FOR LL600 CABLE

VIEW



PART NO. ANO 5111-2088

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A