

**MATERIAL & FINISH:**

1. BODY: BRASS, ALBALOY PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, SILVER PLATED
3. UNLOCK SLEEVE: BRASS, ALBALOY PLATED
4. INSULATOR: PTFE
5. GASKET: MVQ(SILICONE RUBBER)

**ENVIRONMENTAL DATA:**

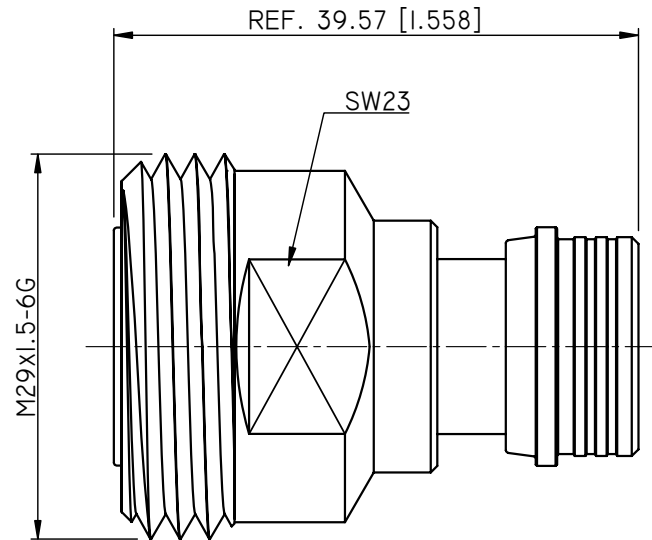
1. TEMPERATURE RANGE: -55°C~+125°C
2. 2011/65/EC (RoHS): COMPLIANT



**ELECTRICAL DATA:**

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~7.5 GHZ
3. VSWR: 1.10 MAX. AT DC~6 GHZ

**REVISIONS**

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/18/15	J. QU



DRAWN X. B. YANG	DATE 04/18/15				
CHECKED L. YANG	DATE 04/18/15				
APPROVED J. QU	DATE 04/18/15				
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD</small>		TITLE ADAPTER, 7/16 FEMALE TO HPQN MALE	
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		VIEW 	PART NO. ANO 562-531-I303		
		SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A