MATERIAL & FINISH:

1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PEI
4 COUPLINIG NUT: STAINLESS STEEL, PASSIVATED

ELECTRICAL SPECIFICATIONS:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~90GHz
3 VSWR: 1.10 MAX. DC-20 GHz
1.25 MAX. 20 GHz - 40 GHz
1.35 MAX. 40 GHz - 90 GHz

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU (RoHS): COMPLIANT AND 2015/863/(RoHS): COMPLIANT
1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/19/20	J. QU

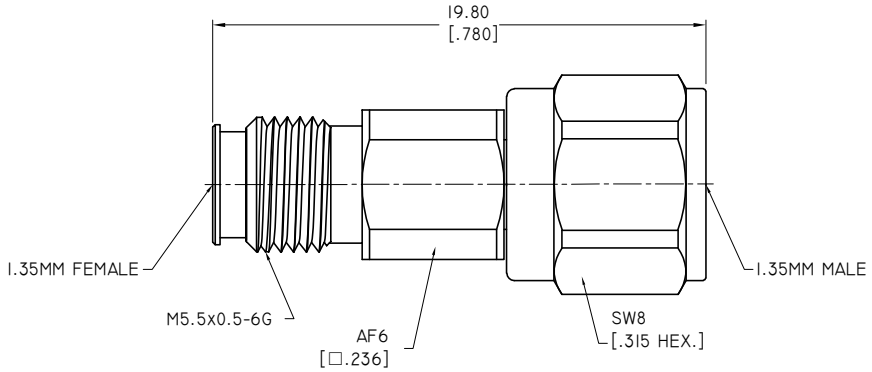



DRAWN	W. YANG	DATE	03/19/20
CHECKED	X. B. YANG	DATE	03/19/20
APPROVED	J. QU	DATE	03/19/20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED
TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON
...we create connection for technologies

TITLE
PRECISION ADAPTER, 1.35MM MALE TO 1.35MM FEMALE

VIEW

PART NO.
PA8080B

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A