



SMP-T Interface Dimensions

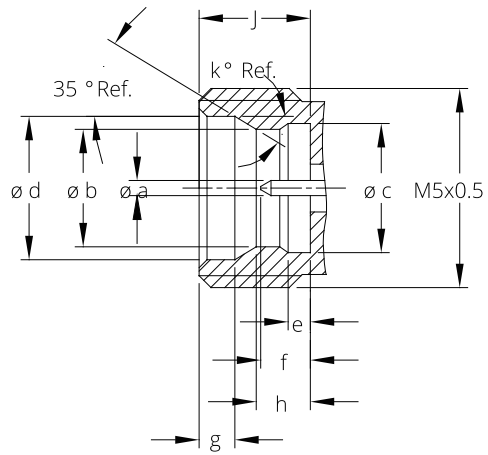

Male

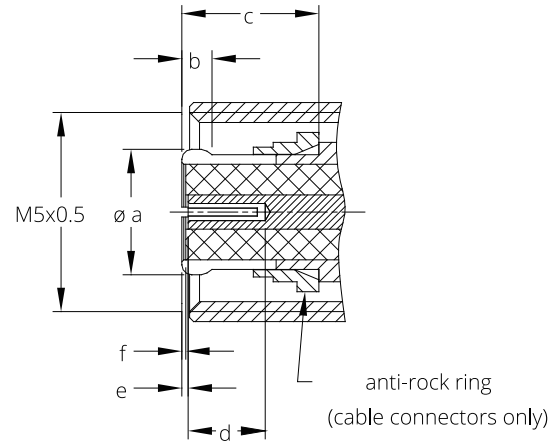

Female

Interface Dimensions

DIMENSION	Male						Female	
	Full Detent		Limited detent		Smooth Bore		Min. mm/inch	Max. mm/inch
	Min. mm/inch	Max. mm/inch	Min. mm/inch	Max. mm/inch	Min. mm/inch	Max. mm/inch		
a	0.36/.014	0.41/.016	0.36/.014	0.41/.016	0.36/.014	0.41/.016	--	3.43/.135
b	2.9/.114	3/.118	3/.118	3.1/.122	3.12/.123	3.23/.127	0.64/.025	0.89/.035
c	3.15/.124	3.2/.126	3.15/.124	3.2/.126	N/A	N/A	3.35/.132	--
d	3.53/.139	3.68/.145	3.53/.139	3.68/.145	3.53/.139	3.68/.145	1.78/.07	--
e	0.52/.021	0.6/.024	0.52/.021	0.6/.024	N/A	N/A	0	0.2/.008
f	1.14/.045	1.4/.055	1.14/.045	1.4/.055	1.14/.045	1.4/.055	0	0.25/.010
g	0.84/.033	0.94/.037	0.84/.033	0.94/.037	0.84/.033	0.94/.037		
h	1.3/.051	1.45/.037	1.37/.054	1.52/.060	1.5/.059	1.65/.065		
J	2.74/.108	2.84/.112	2.74/.108	2.84/.112	2.74/.108	2.84/.112		
K	28°	32°	28°	32°	N/A	N/A		